




Kugellenkränze Baureihe HB Standard

für LKW- Anhänger, landwirtschaftliche Anhänger, Beregnungsmaschinen und Spezialfahrzeuge


Typ	A mm	B mm	C mm	D mm	E mm	F mm	h mm	H mm	Gewicht (Kg)	Axial-Last (t)	Bohr-Bild
HB 12/1000	1000	1011	886	859	960	974	10	90	63	7	-
HB 12	1100	1111	986	959	1060	1074	10	90	69	8	8L (b)
HB 12 (W)	1100	1108	977	946	1060	1074	10	90	73	8	8L (b)
HB 18/1000	1000	1011	886	859	960	974	10	90	63	8	-
HB 18	1100	1111	986	959	1060	1074	10	90	69	10	8L (b)
HB 18 (W)	1100	1108	977	946	1060	1074	10	90	73	10	8L (b)
HB 1000/22	1000	1011	886	859	960	974	10	90	63	10	-
HB 1000/22 (W)	1000	1008	877	846	960	974	10	90	65	10	-
HB 1100/22	1100	1111	986	959	1060	1074	10	90	79	12	8L (b)
HB 1100/22 (W)	1100	1108	977	946	1060	1074	10	90	73	12	8L (b)
HB 1100/24	1095	1108	979	952	1060	1074	10	90	82	16	8L (b)
HB 1100/24 (W)	1095	1108	979	952	1060	1074	10	90	83	16	8L (b)
HB 1200/22	1200	1211	1086	1059	1160	1174	10	90	76	13	8L (b)
HB 1200/22 (W)	1200	1208	1046	1046	1160	1174	10	90	80	13	8L (b)
HB 1300/22	1300	1311	1186	1159	1260	1274	10	90	84	14	8L (b)
HB 1300/22 (W)	1300	1308	1177	1146	1260	1274	10	90	89	14	8L (b)

(W) = Wartungsarme Ausführung mit zwei Dichtlippen erhältlich

Baureihe HB Standard

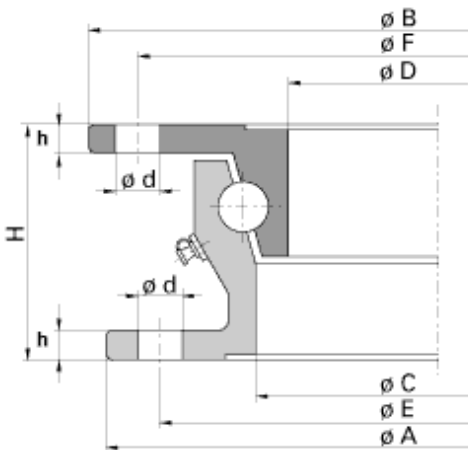

Baureihe HB Standard (W) - wartungsarm

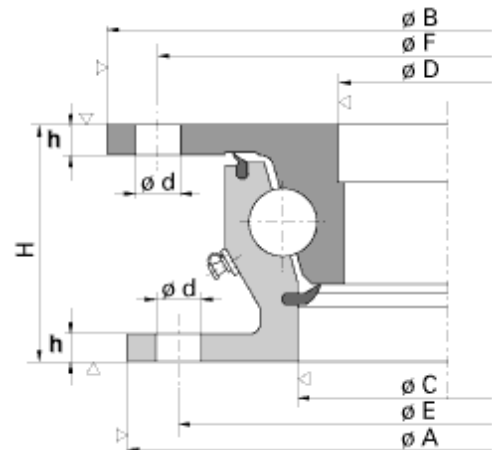

Bohrbild

8L (b)

